

Ao littel Technology Co.Ltd.

Version No.:2018001

REACH Compliance

Spec. No.: 002C

规格承认书

Specification for approval

产品名称: 002C 日系车用快速取电器

Product Type: Custom Dual Circuit Standard ATO ATC

ATS Medium Auto Blade Fuse Holder Add A Circuit Fuse

Tap Piggy Back Plug Socket Tap

Ao littel Technology Co.Ltd. Bld. 16,Yanhe East Road,Xiangdong Village, Dongguan 523833, Guangdong,China H.P.: 1371362419 Fax #:0769-89390418 QQ # : 3217998702 Email : eric.lye@aolittel.com http://www.passivemall.com/ http://www.aolittel.com/



Ao littel Technology Co.,Ltd.

1. Description

Turn one fuse slot into two whole providing protection for both circuits. This dual slot Add-A-Circuit/Add-A-Line/Fuse Plug provides a fuse slot for the existing OEM circuit and a second slot for a new circuit for a mobile electronic device/accessories

2. General Specifications

Insulating Body : Nylon

Applicable : For ATS 1A~40A

Wire: UL 1015 #16 AWG, Length 127mm, Red

Net Weight: 10g for Total Length: 15cm/ 6 inches

3. Features


- 1. Add-a-circuit micro style blade fuse holder.
- 2. Allows easy installation of additional circuits without cutting, splicing or soldering.
- 3. Turns one fuse slot into two!
- 4. Plugs into an existing fuse holder. Protects original circuit and provides a wire lead for the new circuit.
- 5. Provides one fuse holder to protect existing circuit, and a second fuse holder to protect new circuit.
- 6. Ideal replacement fuse holder for auto, car, truck, boat, etc.

7.No splicing or wire cutting necessary to install your electronic accessories

4. UL Certification

For safety,technical parameters must be printed on the UL certificated cable.16AWG insulating layer,thermal resistance up to 105C,flame-retardant level up to V W-1.Enought to use in common vehicle refit for connection to high power devices.

5. Dimension (mm)

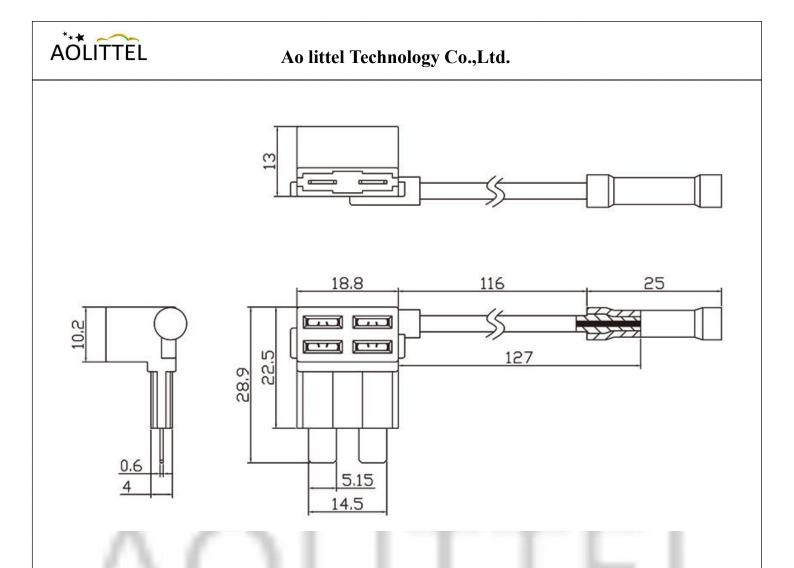

6. Installation Introduction

Installation is easy:

Simply remove an existing fuse from the fuse box, insert that fuse in to the bottom slot of the fuse tap.

Insert a suitable fuse for the new accessory in to the top slot.

Crimp your new live wire to the blue butt terminal on the fuse tap.


Insert the fuse tap into the fuse box slot where the fuse originally was.

AÖLITTEL

Ao littel Technology Co.,Ltd.



Please mind your car original fuse size to decide which size to buy

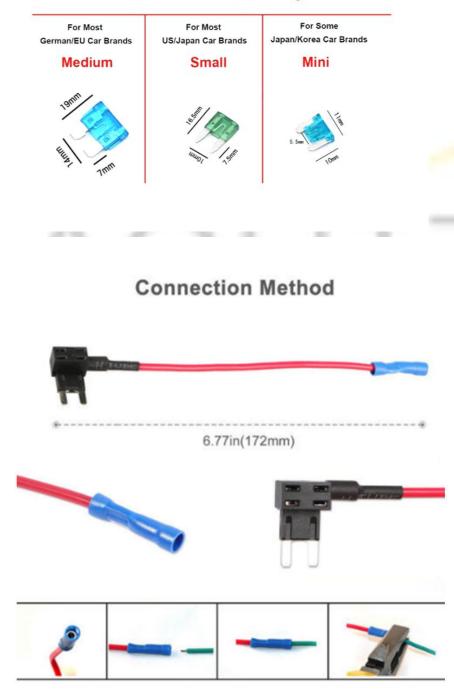

© 2018 Aolittel Technology Specifications are subject to change without notice Revised: 07/12/18